


Mooney M20C, D, G

(Modified with Mooney M20J Cowling)

Kit Number PL60154
 STC Number SA315CH
 Aircraft TCDS Number 2A3

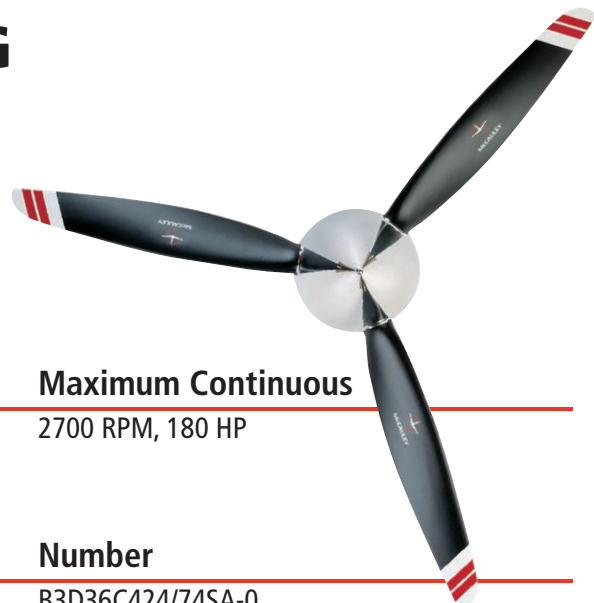

Applicable Aircraft	Engines	Maximum Continuous
M20C	Lycoming O-360-A1D	2700 RPM, 180 HP
M20D	Lycoming O-360-A1D	
M20G	Lycoming O-360-A1D	

STC Kit Contents	Number
1 Propeller Assembly	B3D36C424/74SA-0
1 Polished Aluminum Spinner Assembly	D6504
1 Installation Drawing	D60150
1 Installation Instruction	TR834
1 Flight Manual Supplement	TR833
1 Placard	A60139

Specifications

Propeller Part Number	P4247151-02
Number of Blades	3
Blade Design	Scimitar
Installed Propeller & Spinner Weight	71.3 lbs. (approx.)
Maximum Diameter	74 inches
Minimum Diameter	72 inches
TBO	2000 hours or 72 calendar months (whichever occurs first)
Shipping Weight	140 lbs. (approx.)
Carton Dimensions	79" x 69" x 21" (approx.)
Spinner Carton Dimensions/Weight	30" x 17" x 17" / 14 lbs. (approx.)

Instrument Markings

Yellow Arc – Caution	1650 to 2200 RPM
Green Arc – Normal	2200 to 2700 RPM
Red Radial – Maximum	2700 RPM

Placards

"Avoid continuous operation below 15" M.P. setting between 1650 and 2200 RPM when above 85 KIAS (100 MPH)"

Performance

Performance increases vary depending on individual aircraft and flight conditions. Call the McCauley Sales and Marketing Department for further information at 1-800-621-PROP(7767).



MCCAULEY™

McCauley Propeller Systems

5800 E. Pawnee
 Wichita, KS 67218
 (800) 621-7767
 (316) 831-4021
www.mccauley.textron.com

BLACKMAC™
PERFORMANCE UPGRADE