


Cessna 172RG Cutlass RG

Kit Number PL60166
 STC Number SA495CH
 Aircraft TCDS Number 3A17

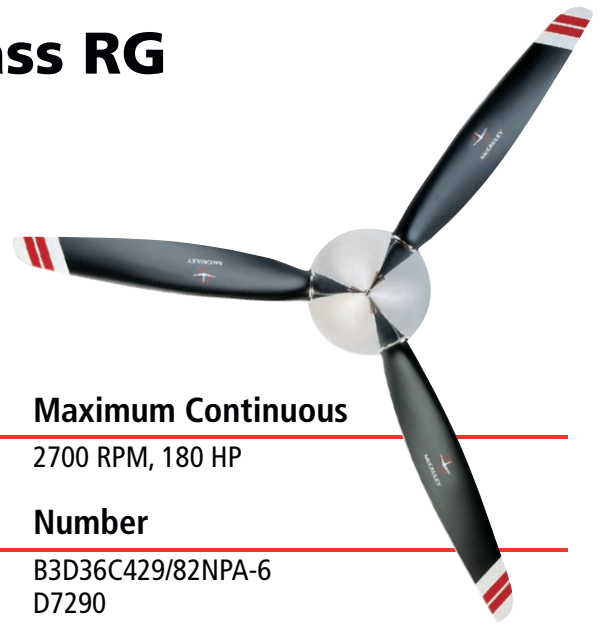

Applicable Aircraft	Engines	Maximum Continuous
172RG	Lycoming O-360-F1A6	2700 RPM, 180 HP

STC Kit Contents	Number
1 Propeller Assembly	B3D36C429/82NPA-6
1 Polished Aluminum Spinner Assembly	D7290
1 Installation Drawing	D60165
1 Installation Instruction	TR844
1 Flight Manual Supplement	TR843
1 Placard	A60163

Specifications

Propeller Part Number	P4295038-01
Number of Blades	3
Blade Design	Scimitar
Installed Propeller & Spinner Weight	73.4 lbs. (approx.)
Maximum Diameter	76 inches
Minimum Diameter	75 inches
TBO	2000 hours or 72 calendar months (whichever occurs first)
Shipping Weight	130 lbs. (approx.)
Carton Dimensions	77" x 69" x 21" (approx.)
Spinner Carton Dimensions/Weight	30" x 17" x 17" / 14 lbs. (approx.)

Placards

"Avoid continuous operation below 15" MP when above 100 MPH. Avoid continuous operation at or above 26" MP"

Instrument Markings - Tachometer

Green Arc (Normal)	S.L. to 7500'	2100 to 2500 RPM (inner arc)
	7500' and above	2100 to 2700 RPM (outer arc)
Red Radial (Rated)		2700 RPM

Performance

Performance increases vary depending on individual aircraft and flight conditions. Call the McCauley Sales and Marketing Department for further information at 1-800-621-PROP(7767).



MCCAULEY™

McCauley Propeller Systems

5800 E. Pawnee
 Wichita, KS 67218
 (800) 621-7767
 (316) 831-4021
www.mccauley.textron.com

BLACKMAC™
PERFORMANCE UPGRADE